


# Ventilation duct, moulded parts rectangular

## Duct

Material	PPs / PPs-el / PVC / PE
Dimension drawing	from 100x100 mm - 3000x3000 mm larger dimensions on request
Operating pressure	+/- 1500 Pa, 40°C higher pressures / temperatures on request
Standard	The maximum deflection of the largest side length for unstiffened ducts is specified in DIN 4740 Part 5 for PVC as well as DIN 4741 Part 5 for PPs.
Reinforcement types	specialty developed flow-optimised internal reinforcements
Connection types	Socket-frame welded, M-flange, special flange
Standard length	max. 3000 mm
Contact us	verkoop@colasit.nl Phone +31 (0)73 641 83 15

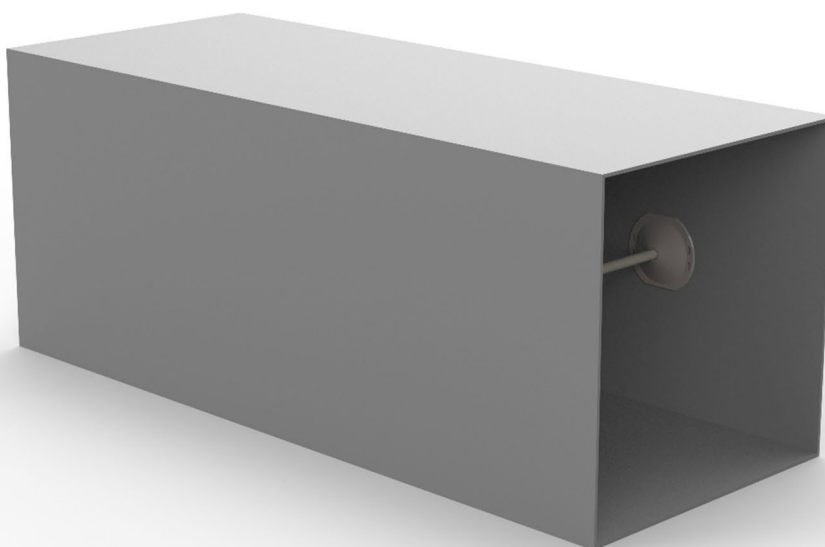

Edition 2026 • Subject to alteration • Copyright by COLASIT AG Spiez

**COLASIT Holland B.V.**  
Plastic construction • Larenweg 56 • NL-5234 KC 's-Hertogenbosch  
Phone +31 (0)73 641 83 15 • verkoop@colasit.nl  
[www.colasit.nl](http://www.colasit.nl)

Competence in plastics. Worldwide.

